Phone. +61 2 4330 5315

Email. sales@saintproducts.com.au

HQ & SHOWROOM U3/3 Pioneer Avenue Tuggerah, NSW 2259, Australia www.saintproducts.com.au



Est. Since 1946

PRODUCT CATALOGUE

Version 1.3

































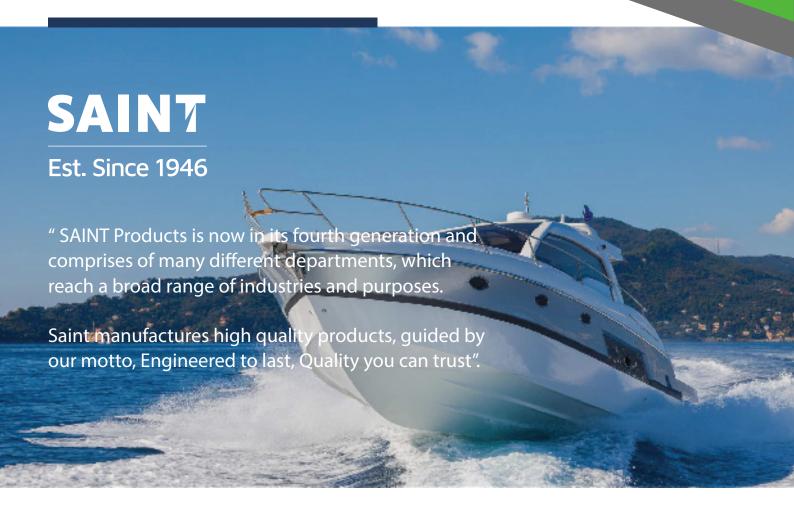


Table of Contents

	About Saint Products	3
	Marine Products	5
	Bow Ends	6 - 7
	Knuckles	7 - 8
	Deck Mounts	9 - 11
	Tube Joiners	11
	Side Mounts	12
	Bow Stay Clips	12
	Rigging	13
	Thumb Screws	14
	Bimini Acessories	15
	Rod Holders & Acessories	15
	Tonneau Fittings	16
	Buckles	17
	Tonneau Loops	18 - 19
	Elastic Cord & Kedar	20
	Cleats & Tube Sizing	21
	2 Bow Canopy Kits	22
	3 Bow Bimini Kits	23
	Anchors & Bollards	24
	Filler Caps 38mm & 50mm	25
	Kingpin Eco Packs & Pegs	26
	Windsylce - Travelers & Deck Cars	27
	Windsylce - Car Hardware	28
	Windsylce - Full Batten Main Systems	29
	Windsylce - Full Batten Main Systems	30
•	Windsylce - Headboard Accessories	31
	Notes and Sketches Pages	32-34



About Saint Products



SAINT Products is now in its fourth generation, and continues to expand into new areas.

Our company is proudly Australian owned and operated.

Saint Fittings are designed in house, and currently distributes throughout Australia, New Zealand, the Asia Pacific region, North America and parts of the EU.







Ordering

You are able to place an order by calling us on +61 2 43305315

Email us at sales@saintproducts.com.au

Or Visit our online stores: www.saintproducts.com.au & www.kingpinpegs.com.au



Freight & Delivery

Domestic Shipping

We use many different couriers and will always strive to deliver your goods in the fastest and cheapest way possible.

International Shipping

We will delivery anywhere in the world. Just contact us for a quotation.



Returns

SAINT Products is not required to provide a refund or replacement if you change your mind. However, if you find one of our products to be defective, or significantly different to the image shown on our website, then we will happily replace the product or provide you with a full refund of the cost of the returned goods. The goods are to be returned to SAINT Products at the customers own cost, prior to the refund being given. If the product deemed to be defective is repairable, we will happily repair it without delay.

It is also a condition of sale, that all goods are not subjected to excessive and unreasonable loads and applications. All nylon products are made to withstand ultraviolet light, however over an extended period of time, these goods will fade and/ or discolour. All stainless steel items are also to be maintained by the customer to ensure they do not tea-stain after extended periods in close proximity to salt water.



Customer Satisfaction

We will always strive to provide you with a timely and reliable service that meets our service standards. We will always provide you with accurate and consistent information and options for your needs. And we will always treat you fairly, with respect and courtesy. Your feedback is always appreciated, whether compliments, suggestions or complaints. What you tell us can help improve our services and products, or correct a problem we may not have been aware of. Please contact us through our website or email us saint. jonathan@saintproducts.com.au and we will respond to your comments promptly.



Privacy

SAINT Products is committed to maintaining your privacy as required by the Privacy and Personal Information Protection Act 1998 (NSW). We will not collect any more information than in necessary for us to fulfil your requests, nor will we disclose your personal information to anyone without your consent. SAINT Products will never give your personal details to anyone!

saintmarineproducts.com.au is a secure site. Additional measures have been put in place when creating this website to ensure the security of our customers credit card and personal information.



Abbreviations Used Throughout this Catalogue

W = Width ID = Inside Diameter L = Length OD = Outside Diameter

H = Height Camber = Roll/Curve across the beam of frame to give height

D = Diameter





Bow Ends



S200B

Suits 20.0mm O.D. x 1.6mm wall thickness aluminium tube.

Material: UV stabilised Nylon 6 Colour: Black

Centre hole in blade designed to suit 1/4" or M6 screw



S207

Suits 31.8mm (11/4") O.D. x 1.6mm wall thickness stainless steel tube Material: 316 grade stainless steel Centre hole in blade designed to suit 5/16" or M8 screw



S209W

Suits 25.0mm O.D. x 1.6mm wall thickness aluminium tube (21.8mm I.D.)

Material: UV stabilised Nylon 6 Colour: White

Centre hole in blade designed to suit 1/4" or M6 screw



S200W

Suits 20.0mm O.D. x 1.6mm wall thickness aluminium tube.

Material: UV stabilised Nylon 6 Colour: White

Centre hole in blade designed to suit 1/4" or M6 screw



S208B

Suits 25.0mm O.D. x 3.0mm wall thickness aluminium tube (19.0mm ID)

Material: UV stabilised Nylon 6 Colour: Black

Centre hole in blade designed to suit 1/4" or M6 screw



S210

Material: UV stabilised Nylon 6 Colour: Black

Designed to suit 25.4mm or 25.0mm O.D. x 1.6mm wall thickness tube to reduce the I.D. to 19.0mm.

Ideal for using with a S204 stainless steel Bow End (internal) in 25.0mm x 1.6mm aluminium tube, thus creating a barrier from corosion when mixing S.S. and Aluminium.



S204

Suits 22.2mm (7/8") O.D. x 1.6mm wall thickness stainless steel tube Material: 316 grade stainless steel. Centre hole in blade designed to suit 1/4" or M6 screw



S205

Suits 25.4mm (1") O.D. x 1.6mm wall thickness stainless steel tube Material: 316 grade stainless steel.

Centre hole in blade designed to suit 1/4" or M6 screw



S208W

Suits 25.0mm O.D. x 3.0mm wall thickness aluminium tube (19.0mm I.D.)

Material: UV stabilised Nylon 6 Colour: White

Centre hole in blade designed to suit 1/4" or M6 screw



S209B

Suits 25.0 O.D. x 1.6mm wall thickness aluminium tube (21.8mm I.D.)

Material: UV stabilised Nylon 6 Colour: Black

Centre hole in blade designed to suit 1/4" or M6 screw



S215

grub screw

Suits 25.4mm (1") O.D. x 1.6mm wall thickness stainless steel tube

External Style – secures with 1 x

Material: 316 grade stainless steel Centre hole in blade designed to suit 5/16" or M8 screw



S217

Suits 31.8mm (11/4") O.D. x 1.6mm wall thickness stainless steel tube

External Style – secures with 1 x grub screw

Material: 316 grade stainless steel Centre hole in blade designed to suit 1/4" or M6 screw



Bow Ends Cont'd



S219

Suits 38.1mm O.D. x 1.6mm wall thickness aluminium tube.

Material: 316 grade stainless steel

Centre hole in blade designed to suit 1/4" or M6 screw



S325B

Suits 25.0mm O.D. x 3.0mm wall thickness aluminium tube Material: UV stabilised nylon 6 Colour: Black

Contains 1/4" UNC captive hex nut Helps secure two poles at a 90 degree connection



S215-G

Suits 25.4mm (11/4") O.D. x 1.6mm wall thickness stainless steel tube External Style – secures with 1 x grub screw

Material: 316 grade stainless steel Colour: Gold Plated

Centre hole in blade designed to suit 5/16" or M8 screw



S326B

Suits 25.0mm O.D. x 1.6mm wall thickness aluminium tube Material: UV stabilised nylon 6 Colour: Black

Contains 1/4" UNC captive hex nut Helps secure two poles at a 90 degree



S217-G

S325W

Colour: White

connection

Suits 31.8mm (1") O.D. x 1.6mm wall thickness stainless steel tube External Style – secures with 1 x grub screw

Material: 316 grade stainless steel Colour: Gold Plated

Centre hole in blade designed to suit 1/4" or M6 screw

Suits 25.0mm O.D. x 3.0mm wall

Material: UV stabilised nylon 6

Contains 1/4" UNC captive hex nut

Helps secure two poles at a 90 degree

thickness aluminium tube



S219-G

Suits 38.1mm (1") O.D. x 1.6mm wall thickness stainless steel tube External Style – secures with 1 x grub screw

Material: 316 grade stainless steel Colour: Gold Plated

Centre hole in blade designed to suit 1/4" or M6 screw



S326W

Suits 25.0mm O.D. x 1.6mm wall thickness aluminium tube Material: UV stabilised nylon 6 Colour: White

Contains 1/4" UNC captive hex nut Helps secure two poles at a 90 degree connection

Knuckles



S220B

UNC thread

Suits 20.0mm O.D. aluminium tube Style: Tapped Nylon Thread Material: UV stabilised Nylon 6 Colour: Black Comes with a 7/8" long combination mush head 304 s/s screw x 1/4"



S220W

UNC thread

Suits 20.0mm O.D. aluminium tube Style: Tapped Nylon Thread Material: UV stabilised Nylon 6 Colour: White Comes with a 7/8" long combination mush head 304 s/s screw x 1/4"



S221B

Suits 19.0mm O.D. aluminium tube Style: Tapped Nylon Thread Material: UV stabilised Nylon 6 Colour: Black Comes with a 7/8" long combination mush head 304 s/s screw x 1/4" UNC thread



S221W

Suits 19.0mm O.D. aluminium tube Style: Tapped Nylon Thread Material: UV stabilised Nylon 6 Colour: White Comes with a 7/8" long combination mush head 304 s/s screw x 1/4" UNC thread



Knuckles Cont'd



S224

Suits 22.2mm (7/8") O.D. stainless steel tube

Style: Non-hinged fitting, secures to tube with grub screw

Material: 316 grade stainless steel

Comes with a 7/8" long philip pan head 304 s/s screw x 1/4" UNC thread and a 1/4" UNC grub screw



S225

Suits 25.4mm (1") O.D. stainless steel tube

Style: Non-hinged fitting, secures to tube with grub screw

Material: 316 grade stainless steel Comes with a 1" long combination mush head 304 s/s screw x 1/4" UNC thread and a 1/4" UNC grub screw



S227

Suits 31.8mm (11/4") O.D. stainless steel tube

Style: Non-hinged fitting, secures to tube with 2 x grub screws Material: 316 grade stainless steel Comes with an M8 socket head screw and 2 x M6 grub screw



S228B

Suits 22.0mm O.D. aluminium tube

Style: Captive Nut Thread Material: UV stabilised Nylon 6

Colour: Black

Comes with a 1" long philip pan head 304 s/s screw x 1/4"" UNC thread and a captive 1/4" UNC 304 s/s hex nut



S228W

Suits 22.0mm O.D. aluminium tube Style: Captive Nut Thread Material: UV stabilised Nylon 6

Colour: White

Comes with a 1" long philip pan head 304 s/s screw x

1/4" UNC thread and a captive 1/4" UNC 304 s/s hex nut



S229B

Suits 25.0mm O.D. aluminium tube Style: Captive Nut Thread Material: UV stabilised Nylon 6

Colour: Black

Comes with a 1" long philip pan head 304 s/s screw x 1/4" UNC thread and a captive 1/4" UNC 304 s/s hex nut



S229W

Suits 25.0mm O.D. aluminium tube Style: Captive Nut Thread Material: UV stabilised Nylon 6

Colour: White

Comes with a 1"long philip pan head 304 s/s screw x 1/4" UNC thread and a captive 1/4" UNC 304 s/s hex nut



S230

Suits 25.4mm (1") O.D. stainless steel tube

Material: 316 grade stainless steel Hinged variety

Hardware: Comes with an M6 socket head screw which clamps the fitting onto the tube and an 1/4" combination screw which secures the bow



S232

Suits 31.8mm (11/4") O.D. stainless steel tube

Material: 316 grade stainless steel Hinged variety

Hardware: Comes with an M6 socket head screw which clamps the fitting onto the tube and an M8 socket head screw which secures the bow end



S238

Suits 38.1mm (1½") O.D. stainless steel tube

Material: 316 grade stainless steel Hinged variety

Hardware: Comes with two M6 socket head screws which clamp the fitting onto the tube and an M8 socket head screw which secures the bow end



S240

Suits 63.5mm (2½") O.D. stainless steel tube

Material: 316 grade stainless steel Hinged variety

Hardware: Comes with two M8 socket head screws which clamp the fitting onto the tube and an M8 socket head screw which secures the bow end



S257

Designed to suit 25.4mm O.D. stainless steel tube

Material: 316 grade stainless steel Comes with $2 \times 5/16''$ screws securing fitting to the tube and $1 \times 1/4''$ UNC combination mush head screw





Knuckles Cont'd



S800B

Suits 22.0mm O.D. aluminium tube Style: Tapped Nylon Thread Material: UV stabilised Nylon 6 Colour: Black

Comes with a 1" long philip pan head 304 s/s screw x 1/4" UNC thread



S801B

Suits 25.0mm O.D. aluminium tube Style: Tapped Nylon Thread Material: UV stabilised Nylon 6 Colour: Black

Comes with a 1" philip pan head 304 s/s screw x 1/4" UNC thread



S801W

Suits 25.0mm O.D. aluminium tube Style: Tapped Nylon Thread Material: UV stabilised Nylon 6 Colour: White

Comes with a 1" long philip pan head 304 s/s screw x 1/4" UNC thread



S230-G

Suits 25.4mm (1") O.D. stainless steel tube

Material: 316 grade stainless steel

Colour: Gold Plated

Hinged variety

Hardware: Comes with an M6 socket head screw which clamps the fitting onto the tube and a 1/4" UNC combination mush head screw which secures the bow end



S232-G

Suits 31.8mm (11/4") O.D. stainless steel tube

Material: 316 grade stainless steel

Colour: Gold Plated

Hinged variety

Hardware: Comes with an M6 socket head screw which clamps the fitting onto the tube and an M8 socket head screw which secures the bow end



S238-G

Suits 38.1mm ($1\frac{1}{2}$ ") O.D. stainless steel tube

Material: 316 grade stainless steel

Colour: Gold Plated

Hinged variety

Hardware: Comes with two M6 socket head screws which clamp the fitting onto the tube and an M8 socket head screw which secures the bow end



S234B

Suits 32.0mm O.D. aluminium tube Style: Tapped Nylon Thread Material: UV stabilised Nylon 6

Colour: Black

Comes with a 1" long philip pan head 304 s/s screw x 1/4" UNC thread and grub screw.

Deck Mounts



S250B

Material: UV stabilised nylon 6 Colour: Black

Style: Tapped nylon thread Flat Base

Comes with a 3/4" long philip pan head 304 s/s screw x 1/4" UNC thread



S250W

Material: UV stabilised nylon 6 Colour: White Style: Tapped nylon thread Flat Base

Comes with a 3/4" long philip pan head 304 s/s screw x 1/4" UNC thread



S252

Material: 316 grade stainless steel Style: Tapped thread 5 degree angled base Comes with a 3/4" long combination mush head 304 s/s screw x 1/4" UNC thread



S2531B

Material: UV stabilised nylon 6 Colour: Black 5 degree angled base Designed to suit nylon and stainless steel deck mounts. Fixing holes align.



Deck Mounts Cont'd



S2531W

Material: UV stabilised nylon 6
Colour: White
5 degree angled base
Designed to suit nylon deck mounts.
Fixing holes align.



S2532B

Material: UV stabilised nylon 6
Colour: Black
Curved Base
Designed to suit nylon and stainless steel deck mounts.
Fixing holes align.



S2532W

Fixing holes align.

Material: UV stabilised nylon 6 Colour: White Curved Base Designed to suit nylon deck mounts.



S253B

S255

Material: UV stabilised nylon 6 Colour: Black Style: captive s/s nut Flat Base Comes with a 3/4" long philip pan head 304 s/s screw x 1/4" UNC thread and captive 1/4" UNC hex nut



S253W

Material: UV stabilised nylon 6
Colour: White
Style: captive s/s nut
Flat Base
Comes with a 3/4" long philip pan
head 304 s/s screw x 1/4" UNC
thread and captive 1/4" UNC hex



S254B

Material: UV stabilised nylon 6 Colour: Black Rotates 180 degree on single line axis Comes with a 7/8" combination mush head 304 s/s screw



S254W

Material: UV stabilised nylon 6 Colour: White Rotates 180 degree on single line axis Comes with a 7/8" combination

mush head 304 s/s screw



Large Style Deck Mount
Material: 316 grade stainless steel
Comes with an M8 screw
Four mounting countersunk
holes on base



S256

Material: 316 grade stainless steel Style: Quick release pin secured with lanyard

Flat base

Same centre to centre base as \$252 and all SAINT medium deck mounts



S258

Rotates 360 degree and is secured to base with a S440 Quick Release Pin Material: 316 grade stainless steel

Comes with a 1/4" UNC combination mush head screw which holds bow end to fitting

Has same mounting holes (centre to centre) of all medium and small deck mounts



S252-G

Style: Tapped thread
Colour: Gold Plated
5 degree angled base
Comes with a 3/4" long combination mush head 304 s/s screw x 1/4"
UNC thread

Material: 316 grade stainless steel



S255-G

Large Style Deck Mount
Material: 316 grade stainless steel
Colour: Gold Plated
Comes with an M8 screw
Four mounting csk holes on
base



Deck Mounts Cont'd



S259B

Flat Base

Material: UV Stabilised Nylon 6 Colour: Black Style: Tapped nylon thread

Large deck mount & 2 fixing holes. Comes with a 1" long x 1/4" UNC pan head head screw



S810B

Material: UV Stabilised Nylon 6 Colour: Black

Style: Tapped nylon thread Flat Base

Comes with a 3/4" long x 1/4" UNC pan phillips head screw



S810W

Material: UV Stabilised Nylon 6 Colour: White Style: Tapped nylon thread

Flat Base

Comes with a ¾" long x ¼" UNC pan phillips head screw.



S440

Quick Release Pin 1/4" Dia x 40mm Long Material - S316 Stainless Steel Compatible with Saint Deck Mounts Including S252, S256 & S258.

Tube - Joiners



S280

Suits 20.0mm O.D. x 1.6mm wall thickness aluminium tube. Machined solid aluminium bar Colour: bright silver anodised 120mm in length



S283

Suits 22.0mm O.D. x 1.6mm wall thickness aluminium tube. Machined solid aluminium bar Colour: bright silver anodised 120mm in length



S284

Suits 25.0mm O.D. x 3mm wall thickness aluminium tube Machined solid aluminium bar Colour: bright silver anodised 120mm in length



S285

Suits 25.4mm (1") O.D. x 1.6mm wall thickness stainless steel tube. Material: 316 grade stainless steel Machined from solid bar.

120mm in length



S286

Suits 25.0mm O.D. x 1.6mm wall thickness aluminium tube Made from 3mm extruded tube Colour: bright silver annodised 120mm in length



S287

Suits 31.8mm (11/4") O.D. x 1.6mm wall thickness stainless steel tube Material: 316 grade stainless steel Machined from solid bar with central placed shoulder 120mm in length



S289

Suits 38.1mm (11/2") O.D. x 1.6mm wall thickness stainless steel tube Material: 316 grade stainless steel Machined from solid bar with central placed shoulder 120mm in length



S291

Suits 25.0mm O.D. x 1.6mm wall thickness aluminium tube Made from 3mm extruded tube Colour: bright silver annodised 2000mm in length



Side Mounts



S260

Material: 316 grade stainless steel Comes with a 7/8" long combination mush head screw x 1/4" UNC thread. 2 x Countersunk Fixing holes



S261B

Style: captive s/s nut
Colour: Black
Material: UV stabilised nylon 6
Comes with 7/8" long combination
mush head screw x 1/4" UNC thread
and a 1/4" UNC hex nut



S261W

Style: captive s/s nut
Colour: White
Material: UV stabilised nylon 6
Comes with 7/8" long combination
mush head screw x 1/4" UNC thread
and a 1/4" UNC hex nut



S262

Material: 316 grade stainless steel Comes with a 5/16" hex head 304 stainless steel screw.

3 x Countersunk Fixing holes

Bow Stay Clips



S320B

Suits 20.0mm O.D. x 1.6mm wall thckness aluminium tube Material: UV stabilised nylon 6 Colour: Black



S320W

Suits 20.0mm O.D. x 1.6mm wall thickness aluminium tube Material: UV stabilised nylon 6 Colour: White



S322B

Suits 19.0mm O.D. x 1.6mm wall thickness aluminium tube Material: UV stabilised nylon 6 Colour: Black



S324B

Suits 22.0mm O.D. x 1.6mm wall thickness aluminium tube Material: UV stabilised nylon 6 Colour: Black



S324B-Short

Suits 22.0mm O.D. x 1.6mm wall thickness aluminium tube Material: UV stabilised nylon 6 Colour: Black



Rigging



S301

Suits 25.0mm fabric strap Material: 5.0mm dia. O.D. 316 grade stainless steel rod
Ends welded together for additional strength



S303

Material: 5.0mm dia. O.D. 316 grade stainless steel rod



S303a

Material: 6.0mm dia. O.D. 316 grade stainless steel rod Dimensions: mounting holes (centre to centre) 47mm apart



S360

To suit 25.0mm fabric strap Material: Nickle Plated steel Ends welded together for additional strength

Dimensions: 32.0mm outside width x 26.0mm total height x 3mm dia rod.



S361

To suit 25.0mm fabric strap Material: 316 grade stainless stee; Ends welded together for additional strength

Dimensions: 38.0mm outside width x 28.0mm total height x 4mm dia rod.



S364

To suit 25.0mm fabric strap Material: Nickle Plated steel Ends welded together for additional strength

Dimensions: 40.0mm outside width x 30.0mm total height x 5mm dia rod.



S365

To suit 25.0mm fabric strap Material: 316 grade stainless steel Ends welded together for additional strength

Dimensions: 38.0mm outside width x 32.0mm total height x 5mm dia rod.



S366

To suit 50.0mm fabric strap Material: Nickle Plated steel Ends welded together for additional strength

Dimensions: 63.0mm outside width x 58.0mm total height x 6mm dia rod.



S368

To suit 50.0 mm fabric strap Material: 316 grade stainless steel Ends welded together for additional strength

Dimensions: 63.0mm outside width x 58.0mm total height x 6mm dia rod.



SSPE-1

5mm Ring width

Square Eye Pad – Small made from 316 grade stainless steel Dimensions: 30mm wide x 35mm long 21mm high 2.5mm thick plate



SSPE-2

Square Eye Pad – Medium made from 316 grade stainless steel Dimensions: 35mm wide x 40mm long 26mm high 2.5mm thick plate 6mm Ring width



SSPE-3

Square Eye Pad – Large made from 316 grade stainless steel Dimensions: 40mm wide x 50mm long 32mm high

3mm thick plate



Thumb Screws



S310B

3 Eared Thumb Screw x 1" long '4" UNC Thread Material: UV Stabilised Nylon 6 Suits all Saint nylon Knuckles and Deck Mounts



S315B

2 Eared Thumb Screw x 1" long ¼"UNC Thread Material: UV Stabilised Nylon 6 Suits all Saint nylon Knuckles and Deck Mounts Colour: Black



S310W

¼"UNC Thread

Material: UV Stabilised Nylon 6

Suits all Saint nylon Knuckles and Deck Mounts

Colour: White

3 Eared Thumb Screw x 1" long



S311B

3 Eared Thumb Screw x 20mm long ¼" UNC Thread Material: UV Stabilised Nylon 6 Only suit Saint Deck Mounts including \$250, \$252, \$253 and \$810 Colour: Black



S315W

2 Eared Thumb Screw x 1" long ¼" UNC Thread Material: UV Stabilised Nylon 6 Suits all Saint nylon Knuckles and Deck Mounts Colour: White



S315R

2 Eared Thumb Screw x 1" long 1/4" UNC Thread Material: UV Stabilised Nylon 6 Suits all Saint nylon Knuckles and Deck Mounts Colour: Red



S316B

2 Eared M6 Thumb Screw x 1" long M6 Metric Thread Material: UV Stabilised Nylon 6 Colour: Black



S317

2 Eared M8 Thumb Screw x 1" long ¼" UNC Thread Material: UV Stabilised Nylon 6 Colour: Black




S318

2 Eared M8 Thumb Screw x 2" Long ¼" UNC Thread Material: UV Stabilised Nylon 6 Colour: Black



S319

2 Eared M8 Thumb Screw x 55mm Long ¼" UNC Thread Material: UV Stabilised Nylon 6 Colour: Black





Bimini Accessories



S328B

Suits 25.0mm O.D. x 1.6mm wall thickness aluminium tube

Allows two 25.0mm O.D. tube to be connected at a 90 degree point

Material: UV stabilised nylon 6

Colour: Black



S330B

Suits 20.0mm x 1.6mm wall thickness aluminium tube

Comes with two eared thumb screw (S315B) which secures side A to side B through a 1/4" UNC hex nut

A slight release in tension of the thumb screw allows the fitting to ratchet to differing positions/ angles.

The Elbow Joint has multiple centrally located teeth to fasten a desired angle in place.

Similar to an Umbrella Joint. Material: UV stabilised nylon 6



S332B

Suits 25.0mm x 1.6mm wall thickness aluminium tube

Comes with two eared thumb screw (S315B) which secures side A to side B through a 1/4" UNC hex nut

A slight release in tension of the thumb screw allows the fitting to ratchet to differing positions/ angles.

The Elbow Joint has multiple centrally located teeth to fasten a desired angle in place.

Similar to an Umbrella Joint. Material: UV stabilised nylon 6



S332

Suits 25.4mm x 1.6mm wall thickness stainless steel tube

Comes with two eared thumb screw (S315B) which secures side A to side B through a 1/4" UNC tapped thread

A slight release in tension of the thumb screw allows the fitting to ratchet to differing positions/ angles.

The Elbow Joint has multiple centrally located teeth to fasten a desired angle in place.

Similar to an Umbrella Joint. Material: 316 grade stainless steel



S340B

To suit 25.0mm O.D. aluminium tube

Tower Clamp designed to hold two poles parallel, 55.0mm apart (centre to centre).

89mm L x 30mm W x 34mm H

Material: Extruded aluminium section Colour: Black powder coated



S342B

To suit 25.0mm O.D. aluminium tube

Tower Clamp designed to hold two poles parallel, 55.0mm apart (centre to centre).

89mm L x 50mm W x 34mm H

Material: Extruded aluminium section Colour: Black powder coated



S346

Suits 25.0mm O.D. aluminium tube

Rocket Launcher designed to suit 40mm fishing rod handles.

Material: Aluminium

Colour: Bright silver anodised



S350B

Suits 25.0mm O.D. aluminium tube Designed to secure two poles parallel in a temporary manner Material: UV stabilised nylon 6

Material: UV stabilised nylon Colour: Black

Rod Holders & Accessories

Product Code	Product Description
S347	All angle adjustable Rod holder - 316 SS - 230mm long
S347-A	All angle adjustable Rod holder - 316 SS - 290mm long
S348	Adjustable Rod holder (25mm rail mount) - 316 SS
S348-A	Adjustable Rod holder (32mm rail mount) - 316 SS
S349-15	Flush mount Rod holder - 316 SS - 15deg.
S349-30	Flush mount Rod holder - 316 SS - 30 deg.
SM-5RD	Adjustable rail mount 5-Rod holder - 316 SS
SM-FCH-1	25mm Rail mount Foldable cup holder - 316 SS





Tonneau Fittings



S305B

Suits up to 6mm shock cord Two mounting holes which accept 5mm rivet/fastener

Dimensions: 40mm long x 24mm wide x 14mm high

Material: UV stabilised nylon 6 Colour: Black



S305W

Suits up to 6mm shock cord Two mounting holes which accept 5mm rivet/fastener

Dimensions: 40mm long x 24mm wide x 14mm high

Material: UV stabilised nylon 6 Colour: White



S305C

Suits up to 6mm shock cord Two mounting holes which accept 5mm rivet/fastener

Dimensions: 40mm long x 24mm wide x 14mm high

Material: Acetal Colour: Chrome Plated



S308C

Suits up to 8mm shock cord Accepts up to 4.8mm rivet/fastener

Dimensions: 18mm width x 15mm height

Material: Acetal

Colour: Chrome Plated



S308B

Suits up to 8mm shock cord Accepts up to 4.8mm rivet/fastener

Dimensions: 18mm width x 15mm heiaht

Material: UV stabilised nylon 6 Colour: Black



S308B-D

Suits up to 8mm shock cord Accepts up to 4.8mm rivet/fastener

Dimensions: 18mm width x 15mm height

Material: PP

Colour: Black



S308B-T

Suits up to 5mm shock cord Accepts up to 4.0mm rivet/fastener

Dimensions: 17mm width x 12mm

Material: UV stabilised nylon 6

Colour: Black



S308W

Suits up to 8mm shock cord Accepts up to 4.8mm rivet/fastener

Dimensions: 18mm width x 15mm height

Material: UV stabilised nylon 6

Colour: White



S308-A-Blk

Suits up to 8mm shock cord Accepts up to 4.8mm rivet/fastener

Dimensions: 18mm width x 15mm

Material: Aluminum Colour - Anodised Black



S308-A-Sil

Suits up to 8mm shock cord Accepts up to 4.8mm rivet/ fastener

Dimensions: 18mm width x 15mm

Material: Aluminum Colour - Anodised Silver



S308-A-Wh

Suits up to 8mm shock cord Accepts up to 4.8mm rivet/ fastener

Dimensions: 18mm width x 15mm

Material: Aluminum Colour - Anodised White



S308SS

Suits up to 8mm shock cord Accepts up to 4.8mm rivet/ fastener

Dimensions: 18mm width x 15mm

Material: 316 grade stainless steel



Buckles



S300B

Material: UV stabilised nylon 6 Colour: Black Designed to suit 25mm fabric



S300W

Material: UV stabilised nylon 6 Colour: White Designed to suit 25mm fabric



S302B

Material: UV stabilised nylon 6 Colour: Black Designed to suit 25mm fabric



S306

Material: 316 grade stainless steel
Designed to suit 25mm fabric.
Slight curve across width



S306-A

Material: 316 grade stainless steel Designed to suit 50mm fabric. Sits Flat across width.



S382

Side Release Buckle Straight – 50mm Material: UV stablised - POM Colour: Black Break Load - 235kg



S384

Side Release Buckle Straight – 25mm Material: UV stablised - POM Colour: Black Break Load - 180kg



S385

Cam Buckle to Suit 25mm fabric Material: 304 Stainless Steel Colour: Black Anodised



S387

Cam Buckle to Suit 25mm fabric Material: 304 Stainless Steel



Tonneau Loops







S600B

50mm long

Length measured from centre of mounting hole in plastic head to end of elastic cord in relaxed state

Material: UV stabilised nylon 6 and woven fabric covered elastic cord 6mm in dia.

Elastic cord is secured using a 316 stainless steel clip and sealed into nylon body through ultrasonic process.

Comes with a nylon button which covers the 4mm dia. Fastener Colour: Black only

S601B

70mm long

Length measured from centre of mounting hole in plastic head to end of elastic cord in relaxed state

Also known as a "130

Material: UV stabilised nylon 6 and woven fabric covered elastic cord 6mm in dia

Elastic cord is secured using a 316 stainless steel clip and sealed into nylon body head through ultrasonic process.

Comes with a nylon button which covers the 4mm dia. fastener Colour:

S601W

70mm long

Length measured from centre of mounting hole in plastic head to end of elastic cord in relaxed state

Also known as a "130

Material: UV stabilised nylon 6 and woven fabric covered elastic cord 6mm in dia

Elastic cord is secured using a 316 stainless steel clip and sealed into nylon body head through ultrasonic process.

Colour White

S602B

80mm long

Length measured from centre of mounting hole in plastic head to end of elastic cord in relaxed state

Also known as a "150

Material: UV stabilised nylon 6 and woven fabric covered elastic cord 6mm in dia

Elastic cord is secured using a 316 stainless steel clip and sealed into nylon body head through ultrasonic process.

Comes with a nylon button which covers the 4mm dia. fastener Colour: Black





S602W

80mm long

Length measured from centre of mounting hole in plastic head to end of elastic cord in relaxed state Also known as a "150"

Material: UV stabilised nylon 6 and woven fabric covered elastic cord 6mm in dia

Elastic cord is secured using a 316 stainless steel clip and sealed into nylon body head through ultrasonic

Comes with a nylon button which covers the 4mm dia. fastener Colour: White

S603B

90mm long

Length measured from centre of mounting hole in plastic head to end of elastic cord in relaxed state Also known as a "170"

Material: UV stabilised nylon 6 and woven fabric covered elastic cord 6mm in dia

Elastic cord is secured using a 316 stainless steel clip and sealed into nylon body head through ultrasonic process.

Comes with a nylon button which covers the 4mm dia. fastener Colour: Black

S603W

90mm long

Length measured from centre of mounting hole in plastic head to end of elastic cord in relaxed state Also known as a "170"

Material: UV stabilised nylon 6 and woven fabric covered elastic cord 6mm in dia

Elastic cord is secured using a 316 stainless steel clip and sealed into nylon body head through ultrasonic

Comes with a nylon button which covers the 4mm dia. fastener Colour: White

S604B

100mm long

Length measured from centre of mounting hole in plastic head to end of elastic cord in relaxed state

Also known as a "190"

Material: UV stabilised nylon 6 and woven fabric covered elastic cord 6mm in dia

Elastic cord is secured using a 316 stainless steel clip and sealed into nylon body head through ultrasonic process.

Comes with a nylon button which covers the 4mm dia. fastener Colour: Black



Measuring Guide for Tonneau Loop; Measure Length from edge of loop when taught to centre of head. Eg: S604B is a 100mm Long Loop





Tonneau Loops Cont'd









S604W

100mm long

Length measured from centre of mounting hole in plastic head to end of elastic cord in relaxed state

Also known as a "190"

Material: UV stabilised nylon 6 and woven fabric covered elastic cord 6mm in dia

Elastic cord is secured using a 316 stainless steel clip and sealed into nylon body head through ultrasonic process.

Comes with a nylon button which covers the 4mm dia. fastener

Colour: Black

S605B

110mm long

Length measured from centre of mounting hole in plastic head to end of elastic cord in relaxed state

Also known as a "209

Material: UV stabilised nylon 6 and woven fabric covered elastic cord 6mm in dia

Elastic cord is secured using a 316 stainless steel clip and sealed into nylon body head through ultrasonic process.

Comes with a nylon button which covers the 4mm dia. fastener

Colour: Black

S605W

110mm long

Length measured from centre of mounting hole in plastic head to end of elastic cord in relaxed state

Also known as a "209

Material: UV stabilised nylon 6 and woven fabric covered elastic cord 6mm in dia.

Elastic cord is secured using a 316 stainless steel clip and sealed into nylon body through ultrasonic process.

Comes with a nylon button which covers the 4mm dia. Fastener

Colour: White

S606B

130mm long

Length measured from centre of mounting hole in plastic head to end of elastic cord in relaxed state

Material: UV stabilised nylon 6 and woven fabric covered elastic cord 6mm in dia.

Elastic cord is secured using a 316 stainless steel clip and sealed into nylon body through ultrasonic process.

Comes with a nylon button which covers the 4mm dia. Fastener

Colour: Black only









S607B

160mm long

Length measured from centre of mounting hole in plastic head to end of elastic cord in relaxed state

Also known as a "310"

Material: UV stabilised nylon 6 and woven fabric covered elastic cord 6mm in dia

Elastic cord is secured using a 316 stainless steel clip and sealed into nylon body head through ultrasonic

Comes with a nylon button which covers the 4mm dia. fastener

Colour: Black

S609B

210mm long

Length measured from centre of mounting hole in plastic head to end of elastic cord in relaxed state

Also known as a "400"

Material: UV stabilised nylon 6 and woven fabric covered elastic cord 6mm in dia

Elastic cord is secured using a 316 stainless steel clip and sealed into nylon body head through ultrasonic process.

Comes with a nylon button which covers the 4mm dia. fastener

Colour: Black

S611B

260mm long

Length measured from centre of mounting hole in plastic head to end of elastic cord in relaxed state

Material: UV stabilised nylon 6 and woven fabric covered elastic cord 6mm in dia

Elastic cord is secured using a 316 stainless steel clip and sealed into nylon body head through ultrasonic process.

Comes with a nylon button which covers the 4mm dia. fastener

Colour: Black

S610

Snap and Press Tool Rivet Punch High Tensile Steel – heat treaded for extended durability

Helps secure the durable fastener to the tonneau loop body head

Can be used with a "G" clamp or other hardware



Measuring Guide for Tonneau Loop; Measure Length from edge of loop when taught to centre of head. Eg: S604B is a 100mm Long Loop





Woven Fabric Covered Elastic Cord



S630B

Quick Fastening and releasing Elastic Cord System Plastic Bullet head only – accepts 5mm cord Colour: Black



S631B

Colour: Black

Cut Pieces of UV Stabilised Woven fabric encompassing multi strand elastic cord. To suit S630B bullet. 75mm in length



S632

Elastic Cord Clip Suits: 6mm cord Material: UV stablised nylon 6 Colour: Black



S634

Elastic Cord Clip Suits: 8mm cord Material: UV stablised nylon 6 Colour: Black



S642B - CORD

UV Stabilised Woven fabric encompassing multi strand elastic cord.

Saint uses multi strand rather than single piece cord, to ensure durability of our products.

This is the same cord we use to manufacture our own tonneau loops

Colour: Black

S642-2B	2mm dia.	100m Length Roll
S642-3B	3mm dia.	100m Length Roll
S642-4B	4mm dia.	200m Length Roll
S642-5B	5mm dia.	200m Length Roll
S642-6B	6mm dia.	100m Length Roll
S642-7B	7mm dia.	100m Length Roll
S642-8B	8mm dia.	100m Length Roll
S642-10B	10mm dia.	50m Length Roll
S642-12B	12mm dia.	45m Length Roll



KEDAR

Tape and Spline system used to attach textiles into sail track. All made with 5mm weld and 25mm tail/weld strip

K4.5-5-25-4.5mm dia cord, 5mm weld, 25mm tail

Colour: Black

K4.5DBLK100 Kedar 4.5mm Double Black 100m RollK4.5DBLK400 Kedar 4.5mm Double Black 400m Roll

K7.5-5-25-7.5mm dia cord, 5mm weld, 25mm tail

Colour: Black

K7.5SBLK100 Kedar 7.5mm Single Black 100m Roll
K7.5SBLK400 Kedar 7.5mm Single Black 400m Roll
K7.5DBLK100 Kedar 7.5mm Double Black 100m Roll
K7.5DBLK400 Kedar 7.5mm Double Black 400m Roll
Colour: White

K7.55WHT100 Kedar 7.5mm Single White 100m Roll K7.5DWHT100 Kedar 7.5mm Double White 100m Roll

K7.5-10-25-7.5mm dia cord, 10mm weld, 25mm tail

 ${\rm K7.5DBLK100}~{\rm Kedar}~7.5 mm~{\rm Double}~{\rm Black}~100 m~{\rm Roll}~{\rm -}~{\rm SPECIAL10} mm~{\rm weld}$

More sizes, colours and styles to come.

Please contact us for more information and custom manufacturing.



Cleats









S370

4" Long SS Cleat

Material: 316 grade stainless steel



6" Long SS Cleat

Material: 316 grade stainless steel

S373

8" Long SS Cleat

Material: 316 grade stainless steel

S380

Material: 316 grade stainless steel Knob head dia. 35mm, Knob head

height approx. 24mm Shoulder dia. 16mm, Shoulder height approx. 17mm

Screw thread: 5/16" UNC







10" Long Cleat

Material: 316 grade stainless steel

12" Long SS Cleat

S375

Material: 316 grade stainless steel

Tube - Sizing



S590

Round 25.0mm O.D. x 1.6mm wall thickness aluminium Colour: Bright Silver anodised Length: 1250 long



S592

Round 25.4mm (1") O.D. x 1.6mm wall thickness 316 grade mirror polished stainless steel Length: 1250 long



S590-Blk

Round 25.0mm O.D. x 1.6mm wall thickness aluminium Colour: Black anodised Length: 1250 long



S593

Round 31.8mm (11/4") O.D. x 1.6mm wall thickness 316 grade mirror polished stainless steel Length: 1250 long



S591

Round 25.0mm O.D. x 3mm wall thickness aluminium Colour: Bright Silver anodised Length: 1250 long



S594

Round 38.1mm (11/2") O.D. x 1.6mm wall thickness 316 grade mirror polished stainless steel Length: 1250 long



S591-Blk

Round 25.0mm O.D. x 3mm wall thickness aluminium Colour: Black anodised Length: 1250 long

'Please contact us for special ength sizes. Can supply full engths or custom cut to size'



2 Bow Canopy Kits



S170S-Small

Frame:

25.0mm O.D. x 1.6mm wall thickness Bright Silver anodised aluminium Comes w/ camber (roll) across the beam

4 x half bows to make 2 Bow Canopy Dimensions once assembled:

- Beam 1800mm
- · Main leg 800mm
- Front leg 400mm Fittings included (nylon):
- S209 Bow End (black) x 4
- S229 Knuckle (black) x 2
- S253 Deck Mount (black) x 2
- S286 Joiner x 2

The frame DOES NOT include fabric.
Other alternatives:

White fittings can be changed.

Black Powder Coated.

Please enquire for availablity.



S172S-Large 1.6mm

Frame:

25.0mm O.D. x 1.6mm wall thickness Bright Silver anodised aluminium Comes w/ camber (roll) across the beam

4 x half bows to make 2 Bow Canopy Dimensions once assembled:

- Beam 2100mm
- Main leg 800mm
- Front leg 400mm
 Fittings included (nylon):
- S209 Bow End (black) x 4
- S229 Knuckle (black) x 2
- S253 Deck Mount (black) x 2
- S286 Joiner x 2

The frame DOES NOT include fabric.

Other alternatives:

White fittings can be changed.

Black Powder Coated.

Please enquire for availablity.



S172S-Large 3mm

Frame:

25.0mm O.D. x 3.0mm wall thickness Bright Silver anodised aluminium Comes w/ camber (roll) across the beam

4 x half bows to make 2 Bow Canopy
Dimensions once assembled:

- Beam 2100mm
- Main leg 800mm
- Front leg 400mm Fittings included (nylon):
- S208 Bow End (black) x 4
- S229 Knuckle (black) x 2
- S253 Deck Mount (black) x 2
- S283 Joiner x 2


The frame DOES NOT include fabric.

Other alternatives:

White fittings can be changed.

Black Powder Coated.

Please enquire for availablity.



S172SS

Frame:


25.4mm O.D. x 1.6mm wall thickness 316 grade mirror polished stainless steel round tube

Comes w/ camber across the beam

4 x half bows to make 2 Bow Canopy Dimensions once assembled:

- Beam 2100mm
- Main leg 800mm
- Front leg 400mm Fittings included (stainless steel):
- S215 Bow End External x 4
- S225 Knuckle x 2
- S252 Deck Mount x 2
- S285 Joiner x 2

The frame DOES NOT include fabric.



S180ss

Frame:

31.8mm O.D. x 1.6mm wall thickness 316 grade mirror polished stainless steel round tube

Comes w/ camber across the beam

4 x half bows to make 2 Bow Canopy Dimensions once assembled:

- Beam 2100mm
- Main leg 800mm
- Front leg 400mm

Fittings included (stainless steel):

- S217 Bow End External x 4
- S227 Knuckle x 2
- S255 Deck Mount x 2
- S287 Joiner x 2

The frame DOES NOT include fabric.

Other alternatives:

Gold Plated fiitings can be changed.

Please enquire for availablity.



3 Bow Bimini Kits



S160S-Small

Frame: 25.0mm O.D. x 1.6mm wall thickness Bright Silver anodised aluminium

Comes w/ camber across the beam

6 x half bows to make 3 Bow Bimini Dimensions once assembled:

- Beam 1800mm
- Main leg 800mm
- Front Leg 800mm
- Middle leg 400mm

Fittings included (nylon):

- S209 Bow End (black) x 6
- S229 Knuckle (black) x 4
- S253 Deck Mount (black) x 2
- S286 Joiner x 3

Frame DOES NOT include fabric.

Other alternatives:

White fittings can be changed.

Black Powder Coated.

Please enquire for availablity.



S162S-Large-1.6mm

Frame: 25.0mm O.D. x 1.6mm wall thickness Bright Silver anodised

Comes w/ camber across the beam

6 x half bows to make 3 Bow Bimini

Dimensions once assembled:

- Beam 2100mm
- Main leg 1200mm
- Front Leg 1200mm
- Middle leg 700mm

Fittings included (nylon):

- S209 Bow End (black) x 6
- S229 Knuckle (black) x 4
- S253 Deck Mount (black) x 2
- S286 Joiner x 3

Frame DOES NOT include fabric.

Other alternatives:

White fittings can be changed.

Black Powder Coated.

Please enquire for availablity.



S166S-Large-3mm

Frame: 25.0mm O.D. x 3.0mm wall thickness Bright Silver anodised

Comes w/ camber across the beam

6 x half bows to make 3 Bow Bimini

Dimensions once assembled:

- Beam 2100mm
- Main leg 1200mm
- Front Leg 1200mm
- Middle leg 700mm

Fittings included (nylon):

- S208 Bow End (black) x 6
- S229 Knuckle (black) x 4
- S253 Deck Mount (black) x 2
- S284 Joiner x 3

Frame DOES NOT include fabric.

Other alternatives:

White fittings can be changed.

Black Powder Coated.

Please enquire for availablity.



S167ss

Frame: 25.4mm O.D. x 1.6mm wall thickness 316 grade mirror polished stainless steel round tube

Comes w/ camber across the beam

6 x half bows to make 3 Bow Bimini Dimensions once assembled:

- Beam 2100mm
- Main leg 1200mm
- Front Leg 1200mm
- Middle leg 700mm

Fittings included (Stainless Steel):

- S215 Bow End x 6
- S225 Knuckle x 4
- S252 Deck Mount x 2
- S285 Joiner x 3

Frame DOES NOT include fabric.



S168ss

Frame: 31.8mm O.D. x 1.6mm wall thickness 316 grade mirror polished stainless steel round tube

Comes w/ camber across the beam

6 x half bows to make 3 Bow Bimini Dimensions once assembled:

- Beam 2100mm
- Main leg 1200mm
- Front Leg 1200mm
- Middle leg 700mm

Fittings included (Stainless Steel):

- S217 Bow End x 6
- S227 Knuckle x 4
- S255 Deck Mount x 2
- S287 Joiner x 3

Frame DOES NOT include fabric.



S181ss

Frame: 38.1mm O.D. x 1.6mm wall thickness 316 grade mirror polished stainless steel round tube

Comes w/ camber across the beam

6 x half bows to make 3 Bow Bimini Dimensions once assembled:

- Beam 2100mm
- · Main leg 1200mm
- Front Leg 1200mm
- Middle leg 700mm

Fittings included (Stainless Steel):

- S219 Bow End x 6
- S238 Knuckle x 4

S289 Joiner x 3

• S255 Deck Mount x 2

Frame DOES NOT include fabric.



Anchors

Grapnel



Α	n	\boldsymbol{c}	h	0	r
, ,		•		v	٠.

For other sizes and styles including Claw, Delta and Plough Please refer to www.saintproducts.com.au

Style	Product Code	Weight
Grapnel	SAG700	0.7KG
Grapnel	SAG1500	1.5KG
Grapnel	SAG2500	2.5KG
Grapnel	SAG3500	3.5KG
Grapnel	SAG4000	4.0KG
Grapnel	SAG5000	5.0KG
Grapnel	SAG6000	6.0KG
Grapnel	SAG7000	7.0KG
Grapnel	SAG8000	8.0KG
Grapnel	SAG10000	10.0KG
Grapnel	SAG12000	12.0KG

Bollards



Product Code	Product Description
SB-1	Angled Cross Bollard 316 SS
SB-2	Split Bollard 316 SS
SB-3	Split Bollard and Locking Pin 316 SS
SB-4	Single Cross Bollard 80 x 80 316 SS
SB-5	Single Cross Bollard 100 x 100 316 SS
SB-6	Single Cross Bollard 135 x 135 316 SS
SB-7	Single Cross Bollard 195 x 150 316 SS
SB-8	Single Cross Bollard 240 x 190 316 SS
SB-10	Dock Bollard 265 x 165dia. 316 SS 300mm x 300mm Base Plate 22mm dia mounting holes Rated for 10t



Filler Caps 38mm









Product Code Product Description

S393W	38mm Water Filler Cap Straight – Lockable with key
S393F	38mm Fuel Filler Cap Straight – Lockable with key
S393G	38mm Waste Filler Cap Straight – Lockable with key
S393D	38mm Diesel Filler Cap Straight – Lockable with key
S395W	38mm Water Filler Cap 45 degree bent – Lockable with key
S395F	38mm Fuel Filler Cap 45 degree bent – Lockable with key
S395G	38mm Waste Filler Cap 45 degree bent – Lockable with key
S395D	38mm Diesel Filler Cap 45 degree bent – Lockable with key





S390

Material: 316 grade stainless steel Dia. 75mm Top plate thickness 3mm Total length 80mm

S392

Material: 316 grade stainless steel Dia. 75mm Top plate thickness 3mm Total length 80mm

Filler Caps 50mm











Product Code Product Description

S394W	50mm Water Filler Cap Straight – Lockable with key
S394F	50mm Fuel Filler Cap Straight – Lockable with key
S394G	50mm Waste Filler Cap Straight – Lockable with key
S394D	50mm Diesel Filler Cap Straight – Lockable with key
S396W	50mm Water Filler Cap 45 degree bent – Lockable with key
S396G	50mm Waste Filler Cap 45 degree bent – Lockable with key
S396F	50mm Fuel Filler Cap 45 degree bent – Lockable with key
S396D	50mm Diesel Filler Cap 45 degree bent – Lockable with key



Accessories









Kingpin Eco Packs







Eco packs avaliable in both 6" and 8" sizes





Custom Designs and Sizes are available upon request, contact us for more information.

Kingpin Pegs



AN ESSENTIAL ACCESSORY FOR THE GREAT OUTDOORS.

HURRICANE HOLD FOR : TOWELS, TOGS & TABLECLOTHS



Heavy-duty Jumbo Pegs will hold in even the windiest conditions.

Wherever you could use a helping hand!

Towels Tal Togs Qu Wet suits Pe

Table Cloths Outdoor covers
Quilts & art Garden & shed
Pet accessories Pool fences

double-strength.

Visit our online store www.kingpinpegs.com.au

Jumbo Pegs - Packets of 10





Super Jumbo Pegs - Packets of 4









Windslyce - Travellers & Deck Cars



C_SL_130_GEN_AL

Code C 130mm Slider Genoa Car



C_SL_130_GEN_AL

Code 1 50mm anchor with one control line sheave



Saint Products

1_50_ANC_2SH

Code 1 50mm anchor with two control line sheaves



1_75_ANC_1SH

Code 1 75mm anchor with one control line sheave



2_TK_AL_ANC

Code 2 control line anchors



C_R_100_BT_AL

Code C 100mm RCB batten car



1_R_050_TV_AL

Code 1 50mm RCB traveler car



1_R_050_TV_PEN_AL

Code 1 50mm RCB traveler with pendulum mounts



1_R_050_TV_PS

Code 1 50mm composite RCB traveler car



1_R_050_X_AL

Code 1 50mm RCB genora car



1_R_075_TV_AL

Code 1 75mm RCB traveler car



1_R_100_TV_AL

Code 1 100mm RCB traveler car



1_R_150_TV_AL

Code 1 150mm RCB traveler car



1_R_50_GEN_16

Dual carriage genoa control - narrow sheave



1_R_50_GEN_35

Dual carriage genoa control - wide sheave



19_R_47_TV_AL

I Beam 47mm RCB traveler car





Windslyce - Travellers & Deck Cars



19_R_62_TV_AL

I Beam 62mm RCB traveler car



2_R_100_TV_AL

Code 2 100mm RCB traveler car



C_100_ANC

Code C track end anchor



C_100_ANC_2SH_BKT

Code C track anchor double sheave and becket



C_100_ANC_2SH_CAM

Code C track anchor double sheave and cam cleat



C_R_075_TV_AL

Code C 75mm RCB traveler car



C_R_100_TV_AL

Code C 100mm RCB traveler car

Windslyce - Car Hardware



GN_LONG_M10

Long Gooseneck pin M10 and hinge



GN_LONG_M10_STP

Long Gooseneck pin M10 with



GN_LONG_M12

Long Gooseneck pin M12 and hinge



GN_LONG_STEP_10

Long Gooseneck pin M10 quick



GN_LONG_STEP_12

Long Gooseneck pin M12 quick release



GN_SHRT_STEP_12

Short Gooseneck pin M12 quick release



stop and hinge



GN_M10_KNUCKLE

Gooseneck hinge to suit M10 pin



SS_BALL_5/32

5/32" Stainless steel balls



release



GN_M12_KNUCKLE

Gooseneck hinge to suit M12 pin



TEF_BALL_(PFTE)

Teflon Balls - Refer to our website for dimensions and pack sizes



GN_SHRT_STEP_10

Short Gooseneck pin M10 quick



TOR_BALL_(SIZE)

Torlan Balls - Refer to our website for dimensions and pack sizes







Windslyce - Full Batten Main Systems



RM164_CAM_CLEAT

Cam Cleat S/S faces 4-8mm rope



RM192_SADDLE

Stainless Steel Saddle



1_R_037_IM_AL

Code 1 37mm RCB batten car



1_R_050_BT_AL

Code 1 50mm RCB batten car



1_R_050_BT_PS

Code 1 50mm composite RCB batten car



1_R_050_IM_AL

Code 1 50mm RCB intermediate car



1_R_050_IM_PS

Code 1 50mm composite RCB batten car



1_SL_037_IM_AL

Code 1 37mm slider intermediate



1_SL_050_IM_AL

Code 1 50mm slider intermediate car



1_SL_075_BT_AL

Code 1 75mm slider batten car



2_R_075_BT_AL

Code 2 75mm RCB batten car



7_R_080_BT_AL

Code 7 80mm RCB batten car



7_SL_050_BT_AL

Code 7 50mm slider batten car



7_SL_050_IM_AL

Code 7 50mm slider intermediate car



7_SL_075_BT_AL

Code 7 75mm slider batten car



7_SL_075_IM_AL

Code 7 75mm slider intermediate car





Windslyce - Full Batten Main Systems



78_SL_070_BT_AL

Code 78 70mm slider batten car



78_SL_070_IM_SS

Code 78 70mm slider intermediate car



Saint Products

B_R_080_BT_AL

Code B 80mm RCB batten car



B_SL_050_BT_AL

Code B 50mm slider batten car



B_SL_050_BT_AL_HD

Code B 50mm heavy duty slider batten car



B_SL_050_IM_AL

Code B 50mm slider intermediate



B_SL_075_BT_AL

Code B 75mm slider batten car



B_SL_075_BT_AL_HD

Code B 75mm heavy duty slider batten car



B_SL_075_IM_AL

Code B 75mm slider intermediate car



C_R_075_BT_AL

Code C 75mm RCB batten car



C_SL_050_IM_AL

Code C 50mm slider intermediate car



C_SL_075_IM_AL

Code C 75mm slider intermediate



C_SL_085_BT_AL

Code C 85mm slider batten car



C_SL_085_IM_AL

 $Code\ C\ 85mm\ intermediate\ car$



C_SL_100_BT_AL

Code C 100mm slider batten car



C_SL_100_IM_AL

Code C 100mm slider intermediate



Windslyce - Headboard Accessories



HDBD_QUAD_BRDE

Quad Car Bridges



HDBD_CAR_QUAD_HD

Quad Car headboard carrier heavy duty



HDBD_CAR_MONO

Single Car headboard carrier



HDBD_CAR_QUAD_LD

Quad car headboard carrier



HDBD_CAR_DUAL

Dual car headboard carrier



Notes



Notes and Sketches Page





Notes



Notes and Sketches Page



Notes



Notes and Sketches Page



SAINT

Est. Since 1946

Phone. +61 2 4330 5315 Email. sales@saintproducts.com.au

HQ & SHOWROOM

U3/3 Pioneer Avenue Tuggerah, NSW 2259, Australia

www.saintproducts.com.au